## Chapter 14 – Form 4: Lanyard Inspection Qualified Inspector

Part # Serial #	Lanyard Configuration	٧	Owner/Company Inspector (print)	Portland Community College
Date 1 <sup>st</sup> use	Single-Leg Lanyard		Signature	
Date manuf	Double-Leg Lanyard		Date Insp. (mmddyy)	
	Internal Shock Absorber:		6-mo. Insp. (mmyy)	
	External Shock Absorber:			
	Cable:   Web			

LABELS & MARKINGS	PASS	FAIL	NOTE
Label (Intact & Legible)			
Appropriate ANSI/OSHA/CSA Markings			
Inspections are Current / Up-to-Date			
Date of First Use			


HARDWARE (Buckles & D-Rings)		FAIL	NOTE
Connector (Self-Closing & Locking)			
Hook Gate / Rivets			
Corrosion			
Pitting / Nicks			


MATERIAL (Web or Cable)		FAIL	NOTE
Broken / Missing / Loose Stitching			
Termination (Stich, Splice, or Swage)			
Webbing Length			
Cuts / Burns / Holes			
Cable Sepa rating / Bird-Caging			

SHOCK PACK (IF Present)	PASS	FAIL	NOTE
Cover/Shrink Tube (Don't Cut or Remove)			
Damage / Fraying / Broken Stitching			
Impact Indicator (Signs of Deployment)			

This inspection is to be completed by a 'Qualified' person <u>prior</u> to each use who will be using the lanyard.



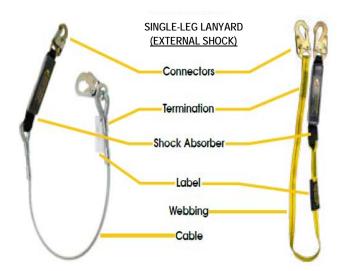

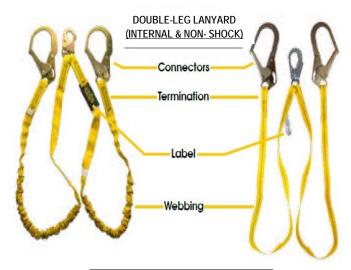

**Example Equipment Only**